

## Features

- **Microprocessor based**
- **4-20mA Analogue Output**
- **Voltage free relay contacts**
- **RS485 digital interface**
- **Alphanumeric dot-matrix display**
- **“One Person” calibration**
- **Small size**
- **Certified ATEX EExd IIC T6**
- **Low power consumption**
- **Standalone operation**

The Monicon S500-OSV is a self contained, intelligent gas sensor that offers a host of sophisticated features to provide fast, reliable warnings against concentrations of organic solvent vapours and other substances (e.g. ammonia).

The S500-OSV will operate as a standalone instrument or in conjunction with a controller or a computer. The S500-OSV is housed in an attractive, compact enclosure and may be configured or calibrated by one person, without declassifying the hazardous area. The gas concentration is indicated on a 4 character alphanumeric display which also indicates instrument status. The S500-OSV is user programmable and no physical adjustments are necessary during calibration as the on-board computer assists the calibration procedure. All user variables are stored in non-volatile memory (EEPROM) and retained indefinitely even during total power failure.




## Typical Applications for the S500-OSV

- **Paint manufacture**
- **Chemical processing**
- **Chemical storage**
- **Solvent storage**
- **Tank farms**
- **Laboratories**
- **Dyeing**
- **Dry cleaning**
- **Refrigeration**


The S500-OSV uses a semiconductor gas sensor combined with advanced, surface-mount microprocessor and firmware technology. Gases and vapours being adsorbed onto the surface of a heated semiconductor element causes the electrical resistance of the semiconductor to change. This resistance change is measured, processed and linearised by the on-board CPU to give a signal proportional to the gas concentration. A watchdog circuit monitors the system operation and resets the CPU if a failure is detected.

The S500-OSV is calibrated or user-programmed by activating the magnetic switches with a magnet. The operator is then guided through a variety of options by a user-friendly menu. The CPU constantly verifies system operation. In the unlikely event of a fault, the operator is alerted with a helpful diagnostic display.

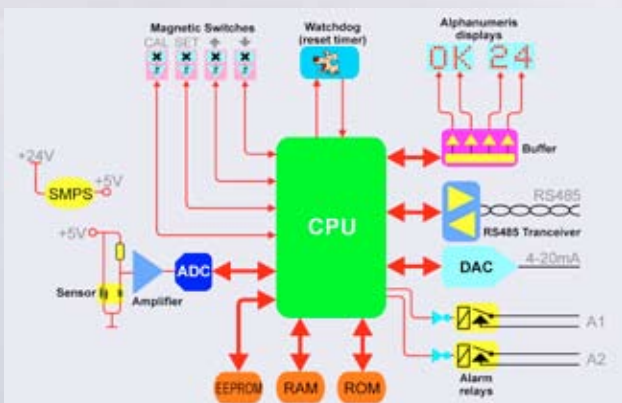

# S500-OSV Specifications

<b>Supply voltage</b>	<i>Nominal 24Vdc (operates from 20Vdc to 35Vdc)</i>
<b>Power consumption</b>	<i>2W nominal, 2.3W maximum</i>
<b>Circuit protection</b>	<i>Electronic current limiter, 1.5A auto-reset</i>
<b>Transient Protection</b>	<i>PCB mounted, 3 Joule, Metal Oxide Varistor</i>
<b>Analogue output</b>	<i>4-20mA current source referenced to 0V</i>
<b>Analogue output load</b>	<i>500 Ohms maximum</i>
<b>Operating temperature</b>	<i>-20°C to +50°C</i>
<b>Storage temperature</b>	<i>-40°C to +66°C</i>
<b>Humidity range</b>	<i>10%RH to 90%RH (Non-condensing)</i>
<b>Preconditioning Requirements</b>	<i>Operational: 30 seconds, Specification: 24 hours</i>
<b>Full-Scale range</b>	<i>0 - 5000ppm LEL (0-2000ppm available for certain substances)</i>
<b>Response time (T90)</b>	<i>Typically &lt;45 seconds</i>
<b>Linearity</b>	<i>±5%</i>
<b>Repeatability</b>	<i>±2%</i>
<b>Resolution</b>	<i>1%</i>
<b>Sensor life</b>	<i>Typically 3-5 years</i>
<b>Weight</b>	<i>1.8Kg (including sensor)</i>
<b>RS485 operating mode</b>	<i>Slave mode, half duplex, polled</i>
<b>Max. units on RS485 loop</b>	<i>100</i>
<b>RS485 comm parameters</b>	<i>1200-N-8-1</i>
<b>RS485 error checking</b>	<i>1 byte checksum</i>
<b>Unit interrogation time</b>	<i>40mS</i>
<b>Relay contacts</b>	<i>SPST, NO, 125V @ 0A5 (30V DC @ 1A) each for A1 &amp; A2</i>
<b>Option setting</b>	<i>Digital setting (all options fitted as standard and user selectable)</i>
<b>Alarm setting</b>	<i>Digital setting (fully adjustable between 10% and 90% of full scale)</i>
<b>Alarm types</b>	<i>Energised/de-energised. Enrichment/deficiency. User selectable</i>
<b>ATEX certification</b>	<i>Eexd IIC T6 (Certificate number 02ATEX1151)</i>
<b>Recommended calibration flow rate</b>	<i>300mL per minute</i>
<b>Mounting holes</b>	<i>2 holes, diam 8mm, spaced 82.5mm</i>
<b>User variable storage</b>	<i>Non-volatile RAM (EEPROM)</i>
<b>Electromagnetic Conformance (EMC)</b>	<i>Complies with EN50081 and EN50082</i>
<b>Cable gland entries</b>	<i>2 entries, each M20 x 1.5</i>
<b>Terminations</b>	<i>PCB mounted terminal blocks to accept 1.5mm<sup>2</sup> cable</i>
<b>Enclosure material</b>	<i>Sand-cast, copper-free aluminium with blue epoxy finish.</i>

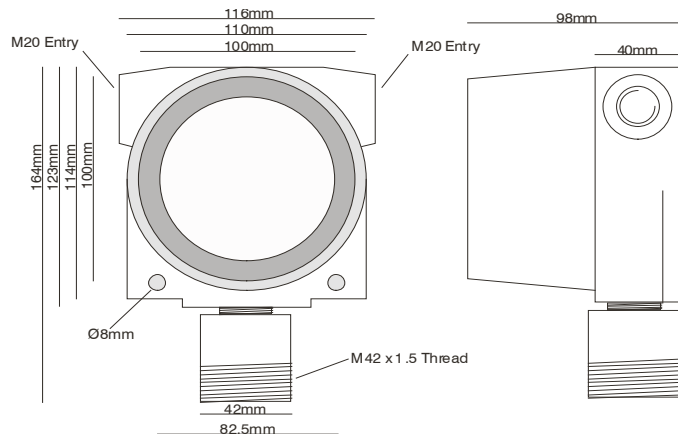

**Monicon Technology Ltd**  
**Ballybrit Industrial Estate**  
**Monivea Road**  
**Galway**  
**Ireland**

Tel: +353 91 752884  
 Fax: +353 91 752886  
 e-mail: sales@monicon.com  
 web-site: www.monicon.com